JUMPKING

PRODUCT CATALOGUE



LUXURY TENTS

PRESIDENTIAL SUITE TENT

Canvas suite tent • deck, glass doors, double roof

STARTING PRICE

From ₹22,00,000

Tentative • taxes as applicable

01 OVERVIEW

A SUITE THAT FEELS LIKE A VILLA, UNDER CANVAS.

Guests open the glass doors straight onto their own deck and view, with the space and comfort of a hotel suite and the feel of sleeping in a tent.

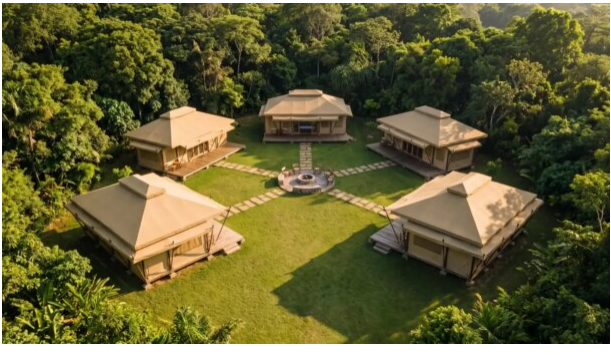

60 to 90 sq m TYPICAL INTERNAL AREA	2 to 4 guests PER SUITE
60 to 90 days LEAD TIME	18% GST APPLICABLE

SPECIFICATIONS

Frame	Powder coated steel
Legs	Angled outrigger supports
Material	Heavy duty canvas
Roof	Double roof with lantern
Front	Timber and glass French doors
Platform	Timber deck on steel sub frame
Internal area	Approx. 60 to 90 sq m

SIZE AND LAYOUT

10 m LENGTH	7.5 m WIDTH
5.5 m CENTRE HEIGHT	75 m² FOOTPRINT

A ISOMETRIC MM

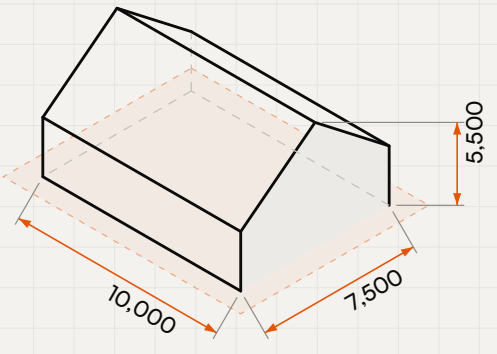

B FRONT ELEVATION MM

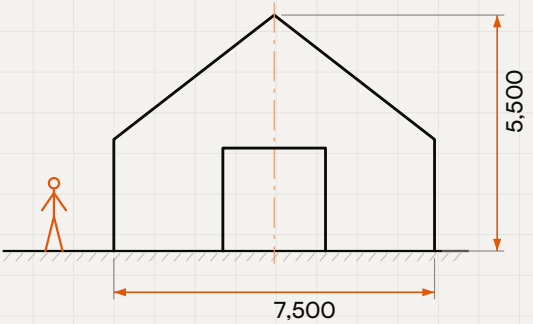

C PLAN MM

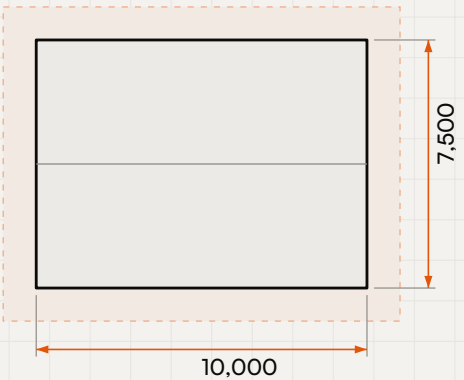

KEY DIMENSIONS

Overall size	10,000 × 7,500 mm
Centre height	5,500 mm
Eave height	2,600 mm
Door	2,400 × 2,400 mm
Clear zone	1,000 mm all round
Site needed	12 × 9.5 m, 114 m²

DRAWING	UNITS
JK-D-37264 • Rev A	mm
SCALE	**PROJECTION**
Not to scale	Third angle

Indicative drawing for planning. Sizes, materials and layout are confirmed in the written quotation.

WHY IT WORKS



01 **Double canvas roof**

A raised lantern roof keeps the room airy and gives the tent its grand look.

02 **Steel outrigger frame**

Angled steel legs hold the canvas taut in wind and rain.

03 **Raised deck**

The timber platform lets the suite sit on lawns, slopes or water edges.

04 **Top room category**

Sized for king beds, a lounge and an attached bathroom.

05 PLANNING

SITE REQUIREMENTS



The suite tent

The suite as supplied: canvas walls, double roof, steel outrigger legs, glass French doors and the timber deck.

SUPPLIED WITH THE ITEM



Site plan

A level plot for the deck plus a path, sit out and clear space around the guy points, as in the layout drawing.

YOU AND JUMPKING



Erection on site

A crew stands the steel legs and tensions the canvas on the finished deck, using hand and power tools.

YOU, OR TECHNICIANS AT A QUOTED CHARGE



Anchored base

Steel leg brackets bolt to a steel sub frame under the deck, with turnbuckles to tension the canvas.

YOU SUPPLY

06 COMMERCIAL

PRICE AND TERMS

STARTING PRICE

From ₹22,00,000

Tentative price for the standard configuration. The real quote is given after we understand the quality, quantity, size, materials, location, budget and current material prices.

GST	18%, extra
Installation	By technicians, quoted per project
Shipping	Extra, at actual
Lead time	60 to 90 days (made to order)
Warranty	As per the manufacturer's terms

Payment	As per the written quotation
Price valid	Confirmed in the quotation

07 PROCESS

HOW IT WORKS

01 **Brief**

Your site, space, audience and budget.

02 **Layout and quotation**

Size, layout, materials and price set out in a written quotation.

03 **Supply**

Made to the agreed specification and dispatched, shipping at actual.

04 **Set up and open**

Installation and staff briefing on request, quoted separately.

08 PLEASE NOTE

ABOUT OUR PRICES

Made to your brief. Most of the range, and every project item, is fully customisable: size, shape, materials, finish, capacity and features are set to your requirement.

Prices are tentative and for guidance only. They are not an offer and not a final price.

Costs move with the world. Pricing depends heavily on international raw material prices and the USD to INR exchange rate. In the present geopolitical climate, freight, labour charges, the cost of living and taxes are all changing quickly, and prices change with them.

A firm price comes in writing. JumpKing issues a binding quotation only after understanding your full requirement: size, shape, quality, safety standards, location, budget, complexity and time frame.

Taxes as applicable on the date of supply. GST and any other taxes are charged at the rates in force when the goods and services are supplied.

Supplied by specialist manufacturers. JumpKing plans, designs and delivers. Photos, drawings and specifications are indicative; warranty is as per the manufacturer's terms.

JUMPKING

09 CONTACT

TALK TO JUMPKING

Share your site, budget and timeline, and receive a written quotation with size, layout and price. Turnkey projects start at ₹2 Cr.

WHATSAPP	+91 82968 26263 · messages only
EMAIL	hello@jumpkingindia.com
OFFICE	45, Royal Enclave, Jakkur, Bangalore 560064
HOURS	Mon to Sat, 12:30 to 20:00

Scan for the live page, latest photos and price.

jumpking.in/shop/presidential-suite-luxury-tent

JK-37264 · 4 NOV 2026